
EET

PAGE	1 OF 2

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
JIANG	WU.J	RELEASE TO RPODUCTION	2005.11.29	01

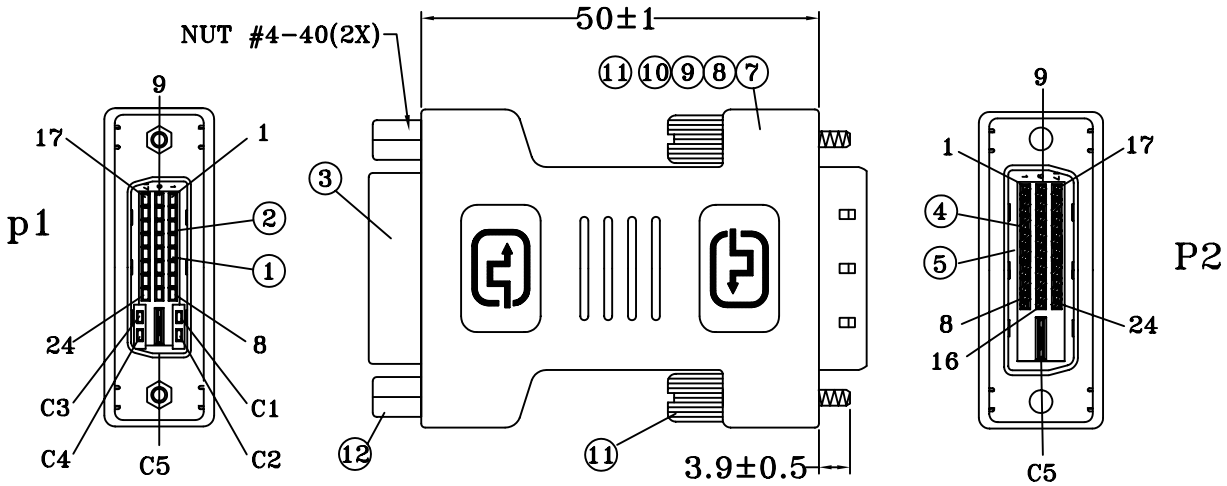

ADAPTER MOLDING TYPE

PIN OUT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
C5	C5
SHELL	SHELL

APPROVE	CHECK	DRAW	PI NO		
			ITEM NO.	MONCB	
			DRAW NO.	0064ET	
			UNIT	mm	SCALE
			TOLERANCE:		NO

DESCRIPTION

DVI_I (24+5)P/F-DVI_I (24+1)P/M
(Adapter)


FM-108


EET

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
JIANG	WU.J	RELEASE TO RPODUCTION	2005.11.29	01

NOTES:

1.CABLE:
JUMP WIRE UL1007 28AWG 7/0.127x1C
2.CONNECTOR:DV(24+5)P FEMALE TO DVI(24+1)P MALE
3.HOOD:ADAPTER MOLDING TYPE,COLOR:BLACK
4.ELECTRICAL TEST:
<1>.100% OPEN SHORT & MISS WIRE TEST.
<2>.INSULATION RESISTANCE:DC300V 10Mohm MIN.
<3>.CONDUCTOR RESISTANCE:1 ohm MAX
5.PACKING: 1PC/POLYBAG+CARD



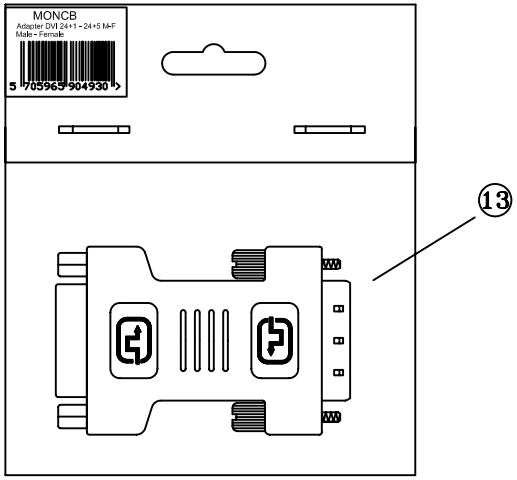

ALL MATERIAL ACCORD WITH "ROHS"

MATERIAL LIST:

NO.	PARTS NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
①	CA-DV-F-0009	DVI (24+5)P/F-CONTACT	BRASS/GOLD PLATED SOLDER TYPE	29	
②		DVI (24+5)P/F-INSULATOR	THERMOPLASTIC/BLACK UL 94V-0	1	
③		DVI (24+5)P/F-SHELL	STEEL NICKEL PLATED	1	
④	CA-DV-M-0004	DVI (24+1)P/M-CONTACT	BRASS/GOLD PLATED SOLDER TYPE	25	
⑤		DVI (24+1)P/M-INSULATOR	THERMOPLASTIC/BLACK UL 94V-0	1	
⑥		DVI (24+1)P/M-SHELL	STEEL NICKEL PLATED	1	
⑦	4-S12BK-0001	JUMP WIRE(UL 1007)	28AWG (7/0.127)x1C L:45mm	25	
⑧	SJ-PE-0-0005	INNER MOLD	PE NATURAL	1	
⑨	SJ-CA-0-0003	COPPER FOIL	W:25mm	1	
⑩	SJ-CA-0-0032	ADAPTER OUTER	45P PVC/BLACK IN COLOR	1	
⑪	LS-NI-0-0027	THUMB SCREW	UNC #4-40, NICKEL PLATED	2	
⑫	LS-NI-0-0021	NUT	NUT #4-40 ø2.0x22.9mm NICKEL PLATED	2	
⑬	LS-PE-1-9797	POLYBAG	PE/0.08x115x120mm	1	
⑭	LS-PE-1-9797	CARD	CARD:108x115MM(OVERALL LENGTH)	1	
⑮	LS-PE-1-9797	LABEL	LABEL:WHITE BOTTOM BLACK WORD	1	

APPROVE	CHECK	DRAW	PI NO		
			ITEM NO.	MONCB	
			DRAW NO.	0064ET	
			UNIT	mm	SCALE
			TOLERANCE:		NO

DESCRIPTION
DVI_I (24+5)P/F-DVI_I (24+1)P/M
(Adapter)